BSI

GENERAL INFORMATION

Project Name: _____

OPTIONS AND ACCESSORIES

GLASS OPTIONS

☐ 3/8" Tempered Glass - Overall Max 66"

☐ 1/2" Tempered Glass - Centerline Max 72"

INSTALLATION OPTIONS

☐ Square Glass Clips (Secured to Counter)

☐ Round Glass Clips (Secured to Counter)

☐ Flush to Counter, Sealed with Silicone
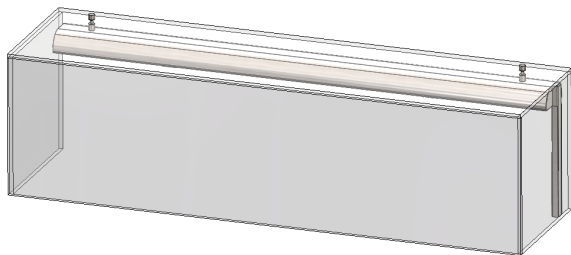
☐ Custom Clamp (Secured to Counter)

LIGHT AND WARMER OPTIONS

Light and warmer housings can be installed as stand alone units or mounted to the top glass.

☐ Slimline 2580 Light

☐ Stealth 790 Warmer

☐ Stealth 705 Light & Warmer Combo Unit

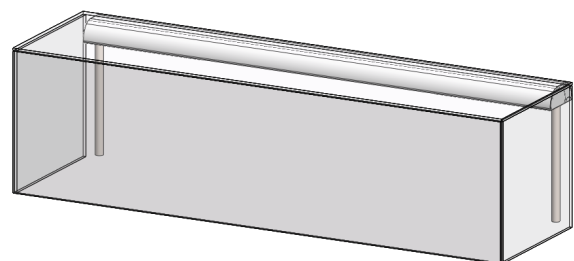☐ Stealth 500 Heat/Light/Heat Combo Unit

CV100-3
ClearView Bonded Glass, Full Service w/ Top Shelf

18"

16" 15-1/2"

INSTALLATION METHODS

Light & Warmer Glass Mounted Configuration

Side Profile

Light & Warmer Stand Alone Configuration

Side Profile

Approval Drawings Required
Specifications subject to change without notice.

NSF COMPONENT   01.25