

## GENERAL INFORMATION

Project Name: \_\_\_\_\_

## STANDARD SPECIFICATIONS

- Finish: Gray
- Remote Infinite Switch
- Housing: Aluminum Extrusion

## OPTIONS AND ACCESSORIES

### OPTIONAL FINISHES

- Gloss Black

Heat/Light/Heat housing is an aluminum extrusion. The housing for warmers is only available in grey or gloss black. Please contact BSI for further information.

### OPTIONAL SWITCH

- Remote Switch
- Indicator Light
- Internal Control

Double unit requires two infinite controls, one per heat rod.

### WIRING EXIT POINT OPTIONS



- Top
- Left Side
- Right Side

## INFORMATION FOR LED BULB

Temperature	3000K
Average Rated Life (hr):	50,000
Color Rendering Index (CRI)	90
Diodes	50 per foot
Electrical	110-250V
Frequency	50/60Hz
Amp Per Foot @ 100V	0.04
Watts Per Foot	5
Lumens Per Foot	400

# 500

## Stealth Heat/Light/Heat Combo

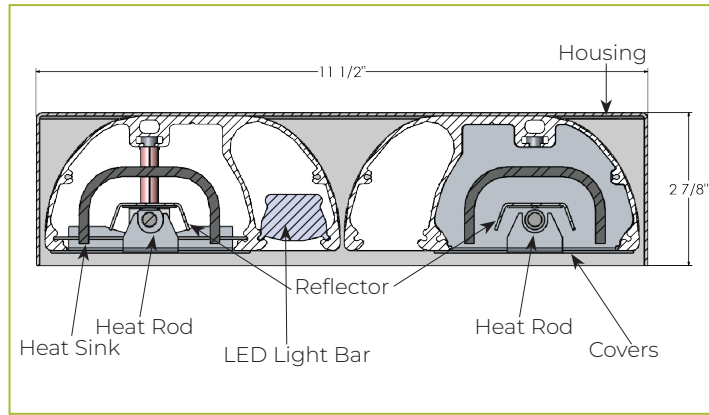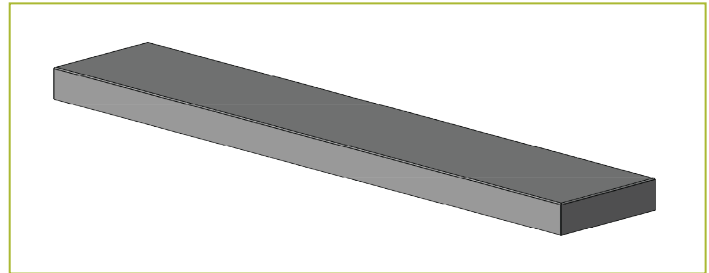

TABLES SHOWN WITH STANDARD LED LIGHT POWER REQUIREMENTS.

MODEL NUMBER	OA HOUSING	VOLTS (Light)*	FREQ.	AMPS CIRCUIT 1	AMPS CIRCUIT 2	WATTS
500-120-18	22"-27"	120 (120)	50/60Hz	5.86	N/A	707
500-120-24	28"-33"	120 (120)	50/60Hz	8.48	N/A	1010
500-120-30	34"-39"	120 (120)	50/60Hz	11.10	N/A	1332
500-120-36	40"-45"	120 (120)	50/60Hz	6.83	6.70	1615
500-120-42	46"-51"	120 (120)	50/60Hz	8.04	7.90	1917
500-120-48	52"-57"	120 (120)	50/60Hz	9.37	9.20	2220
500-120-54	58"-63"	120 (120)	50/60Hz	10.58	10.40	2522
500-120-60	64"-69"	120 (120)	50/60Hz	11.91	11.70	2825
500-120-66	70"-75"	120 (120)	50/60Hz	13.23	13.00	3147
500-120-72	76"-81"	NOT AVAILABLE IN 120 VOLTS				

MODEL NUMBER	OA HOUSING	VOLTS (Light)*	FREQ.	AMPS CIRCUIT 1	AMPS CIRCUIT 2	WATTS
500-208-18	22"-27"	NOT AVAILABLE IN 208 VOLTS				
500-208-24	28"-33"	208 (120)	50/60Hz	4.88	N/A	1010
500-208-30	34"-39"	208 (120)	50/60Hz	6.50	N/A	1332
500-208-36	40"-45"	208 (120)	50/60Hz	7.93	N/A	1615
500-208-42	46"-51"	208 (120)	50/60Hz	9.34	N/A	1917
500-208-48	52"-57"	208 (120)	50/60Hz	10.77	N/A	2220
500-208-54	58"-63"	208 (120)	50/60Hz	12.18	N/A	2522
500-208-60	64"-69"	208 (120)	50/60Hz	13.61	N/A	2825
500-208-66	70"-75"	208 (120)	50/60Hz	7.73	7.50	3147
500-208-72	76"-81"	208 (120)	50/60Hz	8.55	8.30	3480

MODEL NUMBER	OA HOUSING	VOLTS (Light)*	FREQ.	AMPS	WATTS
500-240-18	22"-27"	NOT AVAILABLE IN 240 VOLTS			
500-240-24	28"-33"	240 (120)	50/60Hz	4.28	1010
500-240-30	34"-39"	240 (120)	50/60Hz	5.70	1332
500-240-36	40"-45"	240 (120)	50/60Hz	6.73	1615
500-240-42	46"-51"	240 (120)	50/60Hz	7.94	1917
500-240-48	52"-57"	240 (120)	50/60Hz	9.37	2220
500-240-54	58"-63"	240 (120)	50/60Hz	10.58	2522
500-240-60	64"-69"	240 (120)	50/60Hz	11.81	2825
500-240-66	70"-75"	240 (120)	50/60Hz	13.23	3147
500-240-72	76"-81"	240 (120)	50/60Hz	14.65	3480

\*Note: Light will not operate at 208V or 240V.

Approval Drawings Required

