

GENERAL INFORMATION

Project Name: _____

STANDARD SPECIFICATIONS

- Finish: Gray
- Remote Infinite Switch
- Housing: Aluminum Extrusion

OPTIONS AND ACCESSORIES

OPTIONAL FINISHES

- Gloss Black

Light/Warmer housing is an aluminum extrusion. The housing for warmers is only available in grey or gloss black. Please contact BSI for further information.

OPTIONAL SWITCH

- Remote Switch
- Indicator Light
- Internal Control

WIRING EXIT POINT OPTIONS



- Top
- Left Side
- Right Side

INFORMATION FOR LED BULB

Temperature	3000K
Average Rated Life (hr):	50,000
Color Rendering Index (CRI)	90
Diodes	50 per foot
Electrical	110-250V
Frequency	50/60Hz
Amp Per Foot @ 100V	0.04
Watts Per Foot	5
Lumens Per Foot	400

705

Stealth Light & Warmer Combo

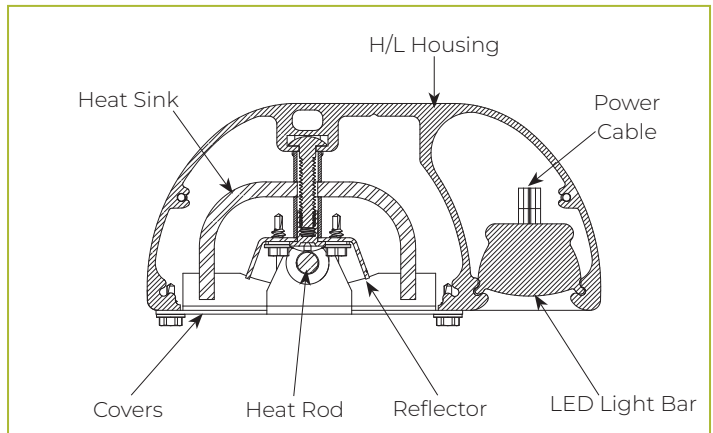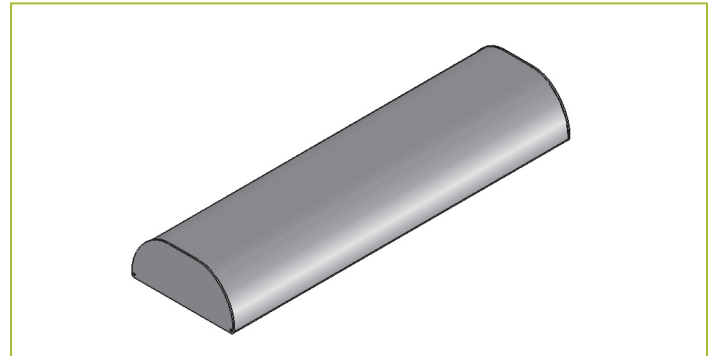

TABLES SHOWN WITH STANDARD LED LIGHT POWER REQUIREMENTS.

MODEL NUMBER	OA HOUSING	VOLTS (Light)*	FREQ.	AMPS	WATTS
705-120-18	22"-27"	120 (120)	50/60Hz	2.96	357
705-120-24	28"-33"	120 (120)	50/60Hz	4.28	510
705-120-30	34"-39"	120 (120)	50/60Hz	5.60	672
705-120-36	40"-45"	120 (120)	50/60Hz	6.83	815
705-120-42	46"-51"	120 (120)	50/60Hz	8.04	967
705-120-48	52"-57"	120 (120)	50/60Hz	9.37	1120
705-120-54	58"-63"	120 (120)	50/60Hz	10.58	1272
705-120-60	64"-69"	120 (120)	50/60Hz	11.91	1425
705-120-66	70"-75"	120 (120)	50/60Hz	13.2	1587
705-120-72	76"-81"	NOT AVAILABLE IN 120 VOLTS			

MODEL NUMBER	OA HOUSING	VOLTS (Light)*	FREQ.	AMPS	WATTS
705-208-18	22"-27"	NOT AVAILABLE IN 208 VOLTS			
705-208-24	28"-33"	208 (120)	50/60Hz	2.48	510
705-208-30	34"-39"	208 (120)	50/60Hz	3.30	672
705-208-36	40"-45"	208 (120)	50/60Hz	4.03	815
705-208-42	46"-51"	208 (120)	50/60Hz	4.74	967
705-208-48	52"-57"	208 (120)	50/60Hz	5.47	1120
705-208-54	58"-63"	208 (120)	50/60Hz	6.18	1272
705-208-60	64"-69"	208 (120)	50/60Hz	6.91	1425
705-208-66	70"-75"	208 (120)	50/60Hz	7.73	1587
705-208-72	76"-81"	208 (120)	50/60Hz	8.55	1755

*Note: Light will not operate at 208V or 240V.

705

Stealth Light & Warmer Combo

MODEL NUMBER	OA HOUSING	VOLTS (Light)*	FREQ.	AMPS	WATTS
705-240-18	22"-27"	NOT AVAILABLE IN 240 VOLTS			
705-240-24	28"-33"	240 (120)	50/60Hz	2.18	510
705-240-30	34"-39"	240 (120)	50/60Hz	2.90	672
705-240-36	40"-45"	240 (120)	50/60Hz	3.43	815
705-240-42	46"-51"	240 (120)	50/60Hz	4.04	967
705-240-48	52"-57"	240 (120)	50/60Hz	4.77	1120
705-240-54	58"-63"	240 (120)	50/60Hz	5.38	1272
705-240-60	64"-69"	240 (120)	50/60Hz	6.01	1425
705-240-66	70"-75"	240 (120)	50/60Hz	6.73	1587
705-240-72	76"-81"	240 (120)	50/60Hz	7.45	1755