

GENERAL INFORMATION

Project Name: _____
 Item: _____
 Quantity: _____
 Model: 705E _____
 Length: _____

OPTIONS AND ACCESSORIES

SWITCH OPTIONS

- Remote Infinite (Standard)
- Remote Switch
- Indicator Light
- Internal Control

SWITCH OPTIONS

- Top
- Left Side
- Right Side

COLOR

- Steel Gray Pearl


Helios lights and warmers ship unassembled and require mounting and wiring at time of installation. Contact BSI for details.

INFORMATION FOR LED BULB


Temperature	3000K
Average Rated Life (hr):	50,000
Color Rendering Index (CRI)	90
Diodes	50 per foot
Electrical	110-250V
Frequency	50/60Hz
Amp Per Foot @ 110V	0.04
Watts Per Foot	5

705E


Helios™ Light & Warmer Combo

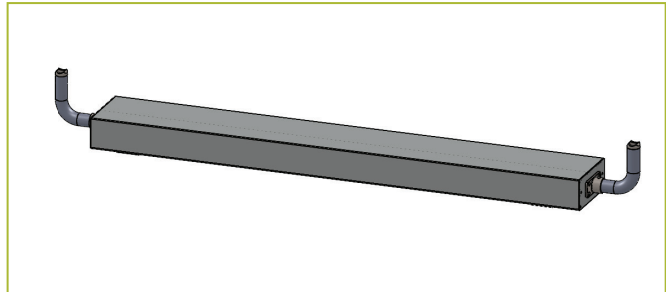

Mounting for BSI E-Series Food Guards

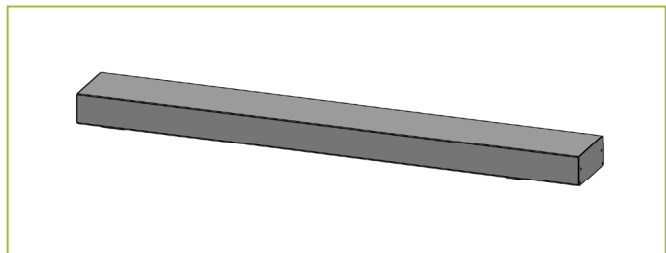

Mounting for all other BSI Food Guards

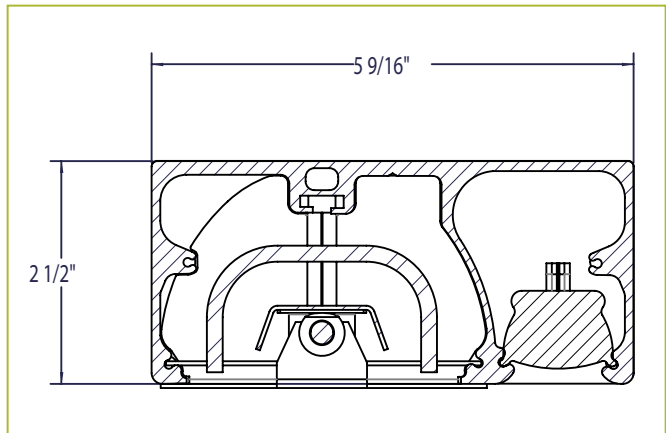


Helios™ Housing Side Cutaway Diagram



705E

Helios™ Light & Warmer Combo

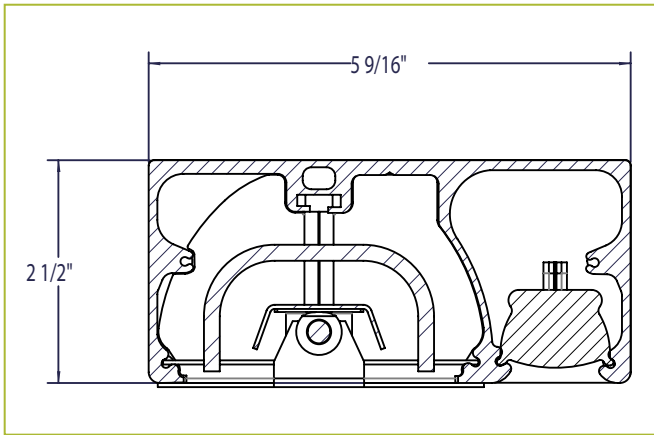

MODEL NUMBER	OA HOUSING	VOLTS (Light)*	FREQ.	AMPS	WATTS
705E-120-18	24"	120 (120)	50/60Hz	2.96	357
705E-120-24	30"	120 (120)	50/60Hz	4.28	510
705E-120-30	36"	120 (120)	50/60Hz	5.60	672
705E-120-36	42"	120 (120)	50/60Hz	6.83	815
705E-120-42	48"	120 (120)	50/60Hz	8.04	967
705E-120-48	54"	120 (120)	50/60Hz	9.37	1120
705E-120-54	60"	120 (120)	50/60Hz	10.58	1272
705E-120-60	66"	120 (120)	50/60Hz	11.91	1425
705E-120-66	72"	120 (120)	50/60Hz	13.2	1587
705E-120-72	78"	NOT AVAILABLE IN 120 VOLTS			

TABLES SHOWN WITH STANDARD LED LIGHT POWER REQUIREMENTS.

MODEL NUMBER	OA HOUSING	VOLTS (Light)*	FREQ.	AMPS	WATTS
705E-208-18	24"	NOT AVAILABLE IN 208 VOLTS			
705E-208-24	30"	208 (120)	50/60Hz	2.45	510
705E-208-30	36"	208 (120)	50/60Hz	3.26	672
705E-208-36	42"	208 (120)	50/60Hz	3.97	815
705E-208-42	48"	208 (120)	50/60Hz	4.68	967
705E-208-48	54"	208 (120)	50/60Hz	5.40	1120
705E-208-54	60"	208 (120)	50/60Hz	6.11	1272
705E-208-60	66"	208 (120)	50/60Hz	6.82	1425
705E-208-66	72"	208 (120)	50/60Hz	7.63	1587
705E-208-72	78"	208 (120)	50/60Hz	8.44	1755

MODEL NUMBER	OA HOUSING	VOLTS (Light)*	FREQ.	AMPS	WATTS
705E-240-18	24"	NOT AVAILABLE IN 240 VOLTS			
705E-240-24	30"	240 (120)	50/60Hz	2.14	510
705E-240-30	36"	240 (120)	50/60Hz	2.85	672
705E-240-36	42"	240 (120)	50/60Hz	3.36	815
705E-240-42	48"	240 (120)	50/60Hz	3.97	967
705E-240-48	54"	240 (120)	50/60Hz	4.68	1120
705E-240-54	60"	240 (120)	50/60Hz	5.29	1272
705E-240-60	66"	240 (120)	50/60Hz	5.90	1425
705E-240-66	72"	240 (120)	50/60Hz	6.61	1587
705E-240-72	78"	240 (120)	50/60Hz	7.33	1755

* Volts shown as element voltage (light voltage)

