

GENERAL INFORMATION

Project Name: _____
Item: _____
Quantity: _____
Model: CUSTOM COFFEE CART
Length: _____

STANDARD FEATURES

- Laminate countertop
- 6" casters, two (2) rigid and two (2) swivel with brakes
- Black rubber caster skirt on three (3) sides
- Black laminate exterior panels
- Laminate drop shelves with T-mold edging
- Laminate raised shelf with PVC edge
- Hand sink with removable water tanks
- Locking storage compartment
- Stainless steel round retractable awning poles
- A-Frame awning with fabric covering (red, blue or yellow)
- Track lighting
- All tanks, valves, piping and fittings to comply with all NSF, local, state and federal health codes and standards
- U.L. Listed
- NSF Listed to Standard 59

OPTIONS

- Vinyl bumper colors
- Fixed awning poles
- Round awning
- Custom exterior panels (powder coated metal, stainless steel, etc.)
- Custom colors
- Custom graphics
- Menu board
- Spot lights
- Cart cover
- Portable waste tank

EQUIPMENT SUPPLIED

- Undercounter refrigerator

EQUIPMENT SUPPLIED OTHERS

- Espresso machine
- Coffee grinder



ELECTRICAL REQUIREMENTS

- 120/208 Volt / 1 Phase / 50 Amp

Specifications subject to change without notice.

CUSTOM COFFEE CART

6' Cart

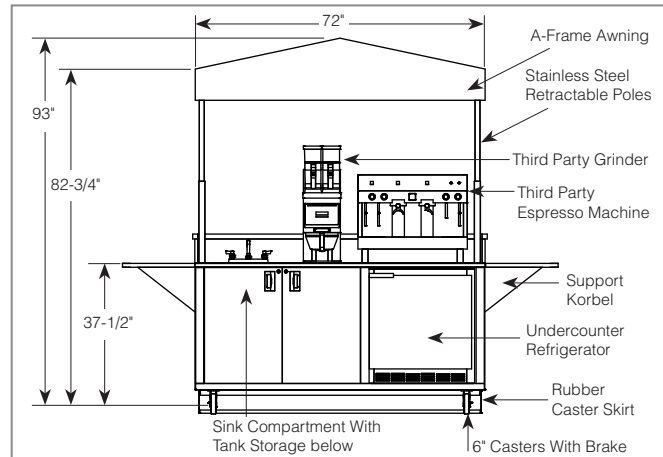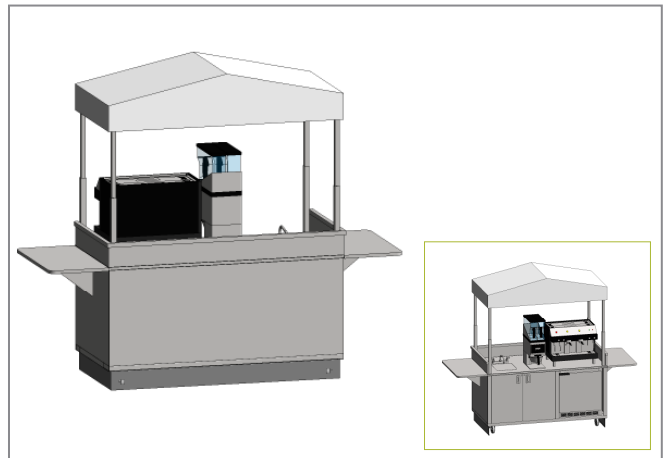

All fixtures and equipment to be connected to a single load center. Cart to have one (1) 8' power cable with a NEMA 14-50P plug.

PLUMBING NOTES

- One (1) 5-1/2 gallon fresh water tote tank
- One (1) 7-1/2 gallon waste water tote tank
- One (1) water pump
- One (1) 2-1/2 gallon hot water heater
- One (1) 2-compartment stainless steel hand sink with two (2) 6-1/8" x 12-1/8" x 5" deep bowls

Fresh and waste water tanks to be accessible from operator side and are removable with quick disconnects for ease of cleaning.

Water heater to deliver water to hand sink between a minimum of 80°F and a maximum of 120°F.